(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 9 September 2005 (09.09.2005)

PCT

(10) International Publication Number WO 2005/083902 A1

(51) International Patent Classification⁷: H04L 1/06

H04B 7/06,

(21) International Application Number:

PCT/JP2005/003667

(22) International Filing Date: 25 February 2005 (25.02.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 2004-053860


27 February 2004 (27.02.2004) JJ

- (71) Applicant (for all designated States except US): MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 5718501 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): LIM, Wei, Lih. TAN, Pek, Yew. APICHAICHALERMWONGSE, Chalermphol. ANDO, Kazuhiro. HARADA, Yasuo.

- (74) Agents: KAWAMIYA, Osamu et al.; Aoyama & Partners, Imp Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 5400001 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR TRANSMITTING DATA IN A MULTI-ANTENNA WIRELESS SYSTEM

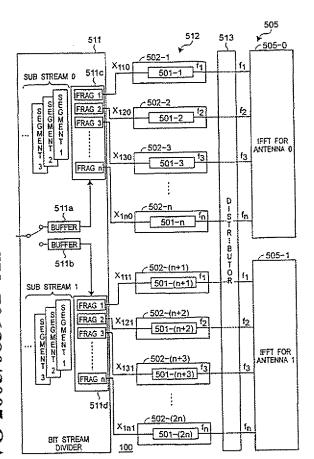

(57) Abstract: The invention is to improve the throughput for a wireless transmission. Multiple antennas are activated in the same frequency at the same time to facilitate parallel transmission. A systematic processes are provided to achieve high throughput transmission.

WO 2005/083902 A1

SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.